

**Parameter Guide.....8.2**

Product Spotlights.....8.2

**Portable .....8.4**GPS Multiparameter with Turbidity,  
ISE and logging probe .....8.4

GPS Multiparameter .....8.12

Environmental .....8.18

Agriculture .....8.20

# Multiparameter Meters

## Product Spotlights

HI 9829 • HI 98290

## GPS Multiparameter Meter with Autonomously Logging Probes

8.4

- Field replaceable ISO 7027 compliant turbidity sensor
- Ammonium, chloride and nitrate ISE's
- Logging from probe or meter
- Display from 1 to 12 parameters with font dimension adjustment
- Track measurement locations with GPS (HI 98290)
- Field replaceable sensors
- Auto-recognition of all sensors
- pH/ORP or pH, four electrode EC or EC/Turbidity and galvanic DO sensors
- Graphic LCD with backlight
- Waterproof protection for meter (IP 67) and probes (IP 68)
- Fast Tracker™—Tag I.D. System simplifies test logging

Rugged, waterproof and easy to use, the HI 9829 and HI 98290 are the ideal meters for field measurements of lakes, rivers and seas. Both meters display 1 to 12 parameters simultaneously from up to 15 user selectable parameters. Combined with one of the HI 76x9829 series probes, the HI 9829 and HI 98290 can measure water quality parameters such as pH, ORP, conductivity, turbidity, temperature, ions ammonium, nitrate, chloride (as  $\text{NH}_4^+-\text{N}$ ,  $\text{NO}_3^--\text{N}$  or  $\text{Cl}^-$ ), dissolved oxygen (as % saturation or concentration), resistivity, TDS, salinity, and seawater  $\sigma$ . Atmospheric pressure is measured for DO concentration compensation.

The HI 98290 with the GPS option incorporates a built-in GPS receiver and antenna that guarantees position accuracy.



## Parameter Guide

### Portable Meters

GUIDE	pH	ORP	EC	TDS	Resistivity	Salinity	Temperature	Ammonium	Chloride	Nitrate	Seawater $\sigma$	Seawater Specific Gravity	Turbidity	Dissolved Oxygen	Atm. Pressure	GPS	Fast Tracker™	Logging	Page
HI 9829	•	•	•	•	•	•	•	•	•	•	•		•	•	•		•	•	8.4
HI 98290	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•	•	•	8.4
HI 9828	•	•	•	•	•	•	•					•		•	•	•	•	•	8.12
HI 991300	•		•	•			•												8.18
HI 991301	•		•	•			•												8.18
HI 9813-5	•		•	•			•												8.20
HI 9813-6	•		•	•			•												8.20
HI 9811-5	•		•	•			•												8.22
HI 9812-5	•		•	•			•												8.22

## Multiparameter Meters

Product Spotlights



HI 9813-5 • HI 9813-6

### Portable Multiparameter Meters for Agriculture

8.20

HI 9813-5 and HI 9813-6 are versatile, water-resistant portable meters specifically designed for agricultural applications such as hydroponics, greenhouses, farming and nurseries.

This series of instruments feature an extra large LCD that clearly displays the parameter being measured as well as calibration instructions. Calibration is fast and easy with knobs located on the front panel of the instrument.



HI 9811-5 • HI 9812-5

### Portable Multiparameter Meters for Agriculture and Ground Water

8.22

HI 9811-5 and HI 9812-5 are pH/EC/TDS water-resistant portable meters designed for simplicity in taking pH,  $\mu\text{S}/\text{cm}$ , ppm (mg/L) and temperature measurements. Both the HI 9811-5 and HI 9812-5 are ideal for hydroponics, greenhouses, farming and ground water applications.

Conductivity measurements are automatically compensated for temperature changes with a built-in temperature sensor. The temperature coefficient is fixed at 2%/°C.



HI 991300 • HI 991301

### Slimline Multiparameter Meters

8.18

HI 991300 and HI 991301 have been designed to offer you pH, conductivity, total dissolved solids and temperature measurements all in a slim, lightweight, portable unit. For greater precision in your application, both models are available, each with different conductivity ranges. From purified to brine waters, just choose the model for your range of measurement.

The HI 1288 pre-amplified multiparameter probe features an easy to clean flat tip sensor and a cloth junction that can be pulled longer to increase the life of the probe. To ensure against interference from transient electrical noise, a solid-state amplifier is integrated into the HI 1288.

HI 9829 • HI 98290

## GPS Multiparameter Meters

**pH/ORP/ISE, EC/TDS/Resistivity/Salinity/Seawater  $\sigma$ , Turbidity, DO, Temperature and Atmospheric Pressure**

- Field replaceable ISO 7027 compliant turbidity sensor
- Ammonium, chloride and nitrate ISE's
- Logging from probe or meter
- Fully customizable instrument, probe, sensors and measurement specifications
- Display from 1 to 12 parameters with font dimension adjustment
- Field replaceable sensors
- pH/ORP or pH, four electrode EC or EC/Turbidity and galvanic DO sensors
- Auto-recognition of all sensors
- Rugged probe with stainless steel tip has a diameter under 2" for wells and pipes
- Track measurement locations with GPS (HI 98290)
- Fast Tracker™–Tag I.D. System simplifies periodic monitoring
- Features a built-in barometer for DO concentration compensation
- Quick or independent sensor calibration feature
- Measurement check eliminates erroneous readings
- Logged data can be displayed as graphs
- Graphic LCD with backlight
- USB for PC connectivity
- Good Laboratory Practice feature with last five parameter calibrations recorded
- Meter accepts both alkaline and rechargeable batteries
- Waterproof protection for meter (IP67) and probes (IP 68)



Rugged, waterproof and easy to use, the HI 9829 and HI 98290 are the ideal meters for field measurements of lakes, rivers and seas. Both meters display 1 to 12 parameters simultaneously from up to 15 user selectable parameters.

Combined with one of the HI 76x9829 series probes, the HI 9829 and HI 98290 can measure water quality parameters such as pH, ORP, conductivity, turbidity, temperature, ions ammonium, nitrate, chloride (as  $\text{NH}_4^+-\text{N}$ ,  $\text{NO}_3^--\text{N}$  or  $\text{Cl}^-$ ), dissolved oxygen (as % saturation or concentration), resistivity, TDS, salinity, and seawater  $\sigma$ . Atmospheric pressure is measured for DO concentration compensation.

The HI 98290 with the GPS option incorporates a built-in GPS receiver and antenna that guarantees position accuracy. Measurements from specific locations are tracked with detailed coordinate information that can be viewed immediately on the display.

Both meters feature a graphic, backlit LCD that scales digits to fit up to 12 parameters and allows full configuration of each parameter measured along with an on-screen graphing capability.

HELP key displays context sensitive help. The alpha-numeric keypad offers a user friendly way to complete the input fields.

### The Perfect Monitoring Tool

Water scientists and managers alike utilize data-collection programs as part of environmental monitoring. These programs are designed to reveal changes in water and the environment around it over time. Reliable, dependable measurements are required to monitor these changes and understand the contributions from seasonal fluctuations, weathering, as well as manmade pollution.





**HI 7609829**  
for pH/ORP, Dissolved Oxygen, EC

**HI 7619829**  
for pH/ORP, Dissolved Oxygen,  
EC/Turbidity

**HI 7629829**  
for pH/ORP, Dissolved Oxygen,  
EC, Logging

**HI 7639829**  
for pH/ORP, Dissolved Oxygen,  
EC/Turbidity, Logging

Four probes to choose from. These **Digital** probes provide stable, noise-free sensor signal management without the need for pre-amplified pH sensors.

## Autonomously Logging probes Available

After starting a log, the HI 7629829 and HI 7639829 logging probes can autonomously log parameters without further connection to the HI 9829 or HI 98290.

Just connect the logging probe to the HI 9829, HI 98290 or a PC to retrieve the logged measurements.

SPECIFICATIONS	HI 7609829	HI 7619829	HI 7629829	HI 7639829	
Supported Configuration	Connector 1	pH, pH/ORP, ammonium ISE, chloride ISE, nitrate ISE			
	Connector 2	dissolved oxygen			
	Connector 3	EC	EC/Turbidity	EC	EC/Turbidity
Upgradeable	to HI 7619829, adding EC/turbidity sensor and long protective shield	–	to HI 7639829, adding EC/turbidity sensor and long protective shield	–	
Temperature sensor	built-in				
Autonomous Logging	–	–	yes	yes	
Logging Interval	–	–	1 second to 3 hours		
Computer Interface	–	–	USB (HI 76982910)		
Memory	–	–	140,000 measurements (single parameter logged); 35,000 measurements (all parameters logged)		
Operating Temperature	-5 to 55°C*				
Maximum Depth	20 m (66')*				
Cable Specification	Multistrand-multiconductor shielded cable with internal strength member rated for 68 kg (150 lb.) intermittent use				
Wetted Materials	Body: ABS; Threads: nylon; Shield: ABS/316 SS; Temperature Probe: 316 SS; O-rings: EPDM				
Logging Probe Internal Battery Type	–	–	1.5V (4) AA alkaline		
Logging Probe Battery Life	–	–	Interval	All channels logging (no averaging)	All channels logging (10 sample averaging)
			1-5 seconds	72 hours	72 hours
			1 minute	22 days	11 days
			10 minutes	70 days	65 days
Note: Log space must be available for continuous logging					
Sample Environment	fresh, brackish, seawater				
Waterproof Protection	IP68				
Dimensions (without cable)	342 mm (13.5"), dia=46 mm (1.8")	382 mm (15.1"), dia 46 mm (1.8")	442 mm (17.4"), dia 46 mm (1.8")	482 mm (19.0"), dia 46 mm (1.8")	
Weight (with batteries and sensors)	570 g (20.1 oz.)	650 g (22.9 oz.)	775 g (27.3 oz.)	819 g (28.9 oz.)	

\* Reduced for ISE sensors

## HI 9829 and HI 98290 • GPS Multiparameter Meters





## Sensors

Hanna offers a selection of 7 sensors to be used on the intelligent probes. Sensor replacement is quick and easy with screw type connectors and color coded sensors. The HI 9829 and HI 98290 automatically recognizes sensor presence.

The new HI 7609829-4 EC/turbidity sensor is field replaceable and offers readings from both parameters at the same time.

All potentiometric sensors feature a double junction design and are gel filled to increase resistance to contamination. An ISE sensor can be used in place of the pH sensor and is automatically recognized. pH in mV readings are also displayed –ideal for troubleshooting.

HI 9828-25 "Quick Calibration" solution

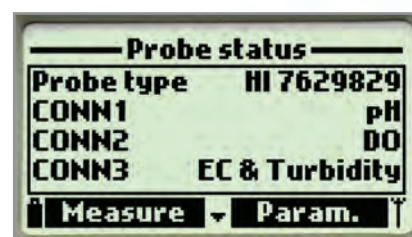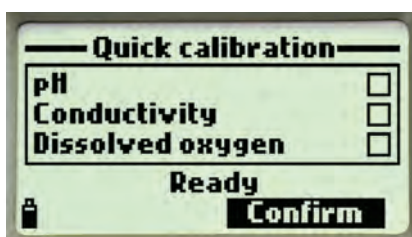

### Field Ready

For field calibration, our quick calibration solution allows users to standardize pH and conductivity with one calibration solution.

### Quick Calibration

Simply screw the calibration beaker filled with HI 9828-25 solution onto the probe, select "Quick calibration" from the menu and press OK. Individual calibration may also be performed using multiple calibration points.

### Auto-sensor recognition

In this example, the HI 9829 is identifying a pH, dissolved oxygen and turbidity/EC sensor

## A Great Combination

The use of HANNA's microprocessor based multiparameter intelligent probes with HI 9829 and HI 98290 meters will provide reliable data collection that can lead to an improved scientific understanding of the interconnections between natural, chemical and geological processes and man made pollution to effectively evaluate applications for waste-discharge permits, remediate contaminated sites and to protect or restore biological resources.

The HI 76x9829 probes utilize field replaceable sensors with auto-recognition. The sensors are housed with the probe electronics in a rugged housing with a water-tight cable connection. The HI 76909829 probe allows conductivity, pH/ORP (or an ISE), and dissolved oxygen measurement. Other probe models allow turbidity and logging.

The probes are available with a choice of cable lengths such as 4 m and 10 m and 20 m (13, 33') that utilize a DIN connection to interface with the meters. Logging probes can be connected directly to a PC with the HI 76982910 USB adapter cable, and HI 929829 PC application software to download log files directly from the probes.

Reliable temperature measurements are a critical parameter of aquatic system monitoring. Temperature and temperature changes due to water releases can affect the ability of water to hold oxygen as well as the ability of organisms to resist certain pollutants. The intelligent probes incorporate an accurate thermistor that changes predictably with temperature changes. Accurate temperature reading in degrees Celsius, Kelvin or Fahrenheit are displayed and utilized by other detectors for temperature correction.

The HI 7609829-0 and -1 features a double junction design and are gel filled to increase resistance to contamination. These pH or pH/ORP sensors incorporate the technology that has made HANNA so successful as a pH manufacturer. Reliable pH measurements are one of the most important indicators of water chemistry indicating the relative amount of free hydrogen and hydroxyl ions in the water. HANNA's pH sensors utilize a resilient PEI body to protect them from solid particulates found water samples. Consistency and quality are the hallmarks of these sensors. Our differential measurement system further enhances the measurement reliability providing temperature corrected pH.

A choice of 3 ion selective electrodes is available for constant reporting of common surface water contaminants. Nitrate,

## Sensor Configurations

Both probes can accommodate a multitude of sensor configurations. The long sensor cap fits all configurations while the short sensor cap fits configurations not requiring the turbidity/EC sensor.



ammonium and chloride ISE's are available. Each ISE is a combination electrode incorporating an extremely constant reference spiral; all potentiometric probes feature a double junction and solid gelled reference design. By utilizing conductivity, the HI 9829 and HI 98290 can convert ion activity measurements to concentration units. The HI 9829(0) displays these measurements as ppm ammonium-nitrogen, ppm chloride and ppm nitrate-nitrogen.

The HI 7609829-3 4-electrode conductivity sensor using the polarographic measurement principal ensures stable conductivity readings. Electrolytic conductivity measures of the ability of water to conduct an electrical current. It is highly dependent on the amount of dissolved solids (such as salt) in the water. Absolute conductivity, temperature corrected conductivity, salinity, Seawater  $\sigma$  and water hardness (TDS) determinations are possible with measurements from this sensor.

The oxygen dissolved in lakes, rivers, and oceans is crucial for the organisms and creatures living in it. If dissolved oxygen concentrations drop below normal levels in water bodies, the water quality degrades and the organisms begin to die off. The HI 7609829-2 galvanic DO sensor does not require long polarization times so is ready for measurement at a moment's notice. This sensor also utilizes a replaceable cap design for ease of maintenance and a

safe non-toxic electrolyte. DO readings are compensated for the effects of temperature (using the probes built-in temperature sensor) and atmospheric pressure (using the HI 9829 and HI 98290's internal atmospheric pressure sensor). The DO measurement complies with standard methods 4500-O G. and EPA article 360.1.

The HI 7609829-4 combined EC/turbidity sensor is a replaceable design for instantaneous conductivity and turbidity measurements that conform to ISO 7027 standards. It provides measurements from 0.0 to 1000 FNU. Turbidity is the amount of particulate matter that is suspended in water. Turbidity measures the scattering effect that suspended solids have on light: the higher the intensity of scattered light, the higher the turbidity. Material that causes water to be turbid include: clay, silt, finely divided organic and inorganic matter, soluble colored organic compounds, plankton and microscopic organisms. Conductivity measurement is the same as in the HI 7609829-3.



Probes with the logging function have a logging memory that allows storage of up to 140,000 individual samples or 35,000 complete sample data sets with date and time stamp thus permitting up to a 70 day deployment with all channels logging at 10 minute intervals. The probe incorporates a temperature sensor for temperature compensation of all parameters.



A man wearing a light-colored fedora and a blue polo shirt with white stripes is seated in a small boat on a body of water. He is holding a handheld electronic device in his hands. On his lap, there is a large coil of white cable and a clipboard with a white sheet of paper. A black equipment case is visible to his left. The background shows the calm surface of the water.

The new HI 98290 features an internal 12 channel GPS receiver and antenna that calculates its position to track locations along with measurement data. The GPS tracks your location using satellites to within 30 ft (10 m) so you can be sure that you return to the same location for repeated measurements. The GPS coordinates can be

shown on the LCD together with up to 10 measurement parameters and are recorded with logged data. Users can connect to GPS tracking software such as Google™ Maps\* to view locations where samples have been taken. Measurement information is shown right on the map.

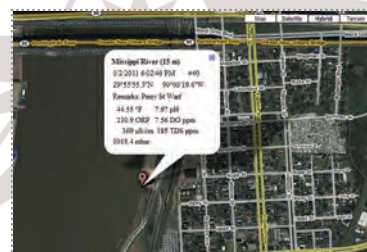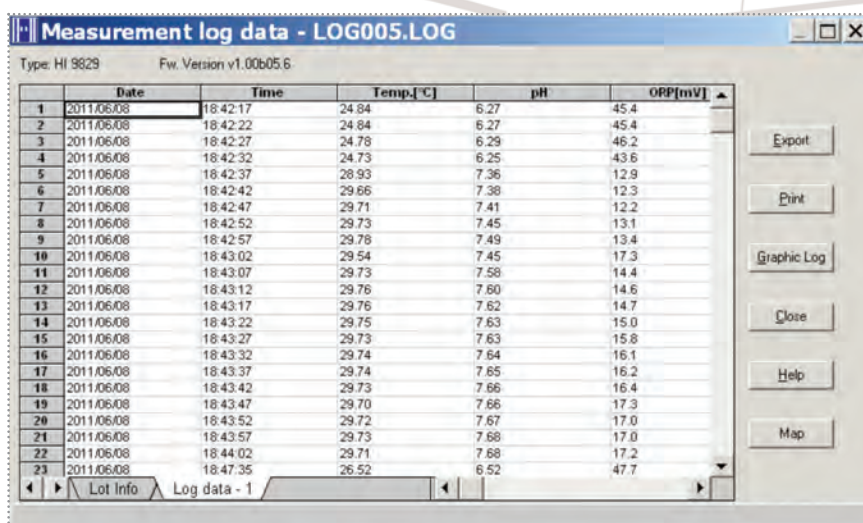

Nearby locations	
Blackstone river	2.8 mi
Diamond Hill res.	6.0 mi
Arnolds Mill res.	6.2 mi

141.5 mVCl  
113.2 ppmCl  
16.09 °C  
41°54'39.1" N  
71°24'13.1" W

Log Menu

**GPS status**  
Latitude: 41°59'49.1"N  
Longitude: 71°28'37.5"W  
Satellites: 7  
**GPS OFF**

Shows current position and number of satellites.

- GPS coordinates shown on the LCD with up to 10 measurement parameters
- GPS signal strength shown on LCD
- Logged data is embedded with GPS coordinates
- GPS status screen

- Users can associate GPS coordinates with alphanumeric locations
- Distances between current location and predefined locations are displayed arranged by distance
- Memorizes last location and time should signal be lost


- Manages logged data from the HI 9829
- Displays GPS coordinates with logged data
- Automatically maps samples on your PC (internet connection required)
- Shows location points on map with measurement data

## 8.8






## Intuitive Configuration, Measurement and Help

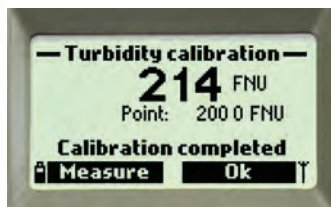

### Calibration

Calibration with the HI 9829(0) is easy and intuitive.

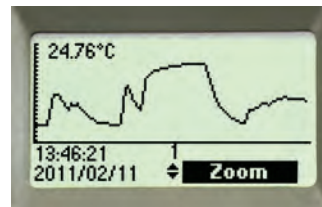



### Graphing

Trend graphing may be viewed on the display or transferred to a PC. The sample date and time stamp will also be displayed.

### Help

The context sensitive help screen is always accessible.

## Fully Configurable Measurement Screen

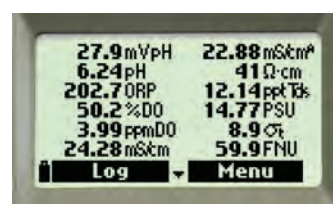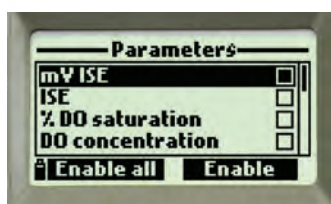


## Fast Tracker™ – Tag Identification System

HANNA's Fast Tracker™ – Tag Identification System simplifies test logging. iButton®s with a unique ID can be installed at various sampling sites. When the matching connector on the meter contacts the location button, measurements are logged and labeled with the alphanumeric user-entered location ID. Location, date, time and measurements are logged into the meter which can be transferred to a PC. The Fast Tracker™ system complements the GPS for ultimate tracking.

**FastTracker™**  
A new revolution in organized data management.

## iButton® Tags are Easy to Install

Install the optional TAGs near your sampling points for quick and easy iButton® readings. Each TAG contains a computer chip with a unique identification code encased in stainless steel. You can install a practically unlimited amount of TAGs. Additional TAGs can be ordered for all of your traceability requirements.

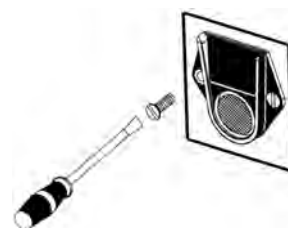

## HI 9829 and HI 98290 • GPS Multiparameter Meters

SPECIFICATIONS	HI 9829	HI 98290 with GPS
Temperature Compensation	automatic from -5 to 55°C (23 to 131°F)	
GPS	–	12 channel receiver
Logging Memory from Meter	44,000 records	
Logging Interval	1 second to 3 hours	
Computer Interface	USB (with HI 929829 software)	
FastTracker™ TAG ID	Yes	
Waterproof Protection	IP67	
Environment	0 to 50°C (32 to 122°F); RH 100%	
Power Supply	1.5V alkaline C cells (4) / 1.2V NiMH rechargeable C cells (4), USB, 12V power adapter	
Dimensions	221 x 115 x 55 mm (8.7 x 4.5 x 2.2")	
Weight	750g (26.5 oz.)	



SPECIFICATIONS		HI 9829 and HI 98290 PARAMETERS			
pH / mV of pH input		ORP mV	Ammonium-Nitrogen	Chloride	Nitrate-Nitrogen
Range	0.00 to 14.00 pH / ±600.0 mV	±2000.0 mV	0.02 to 200 ppm (as N)	0.6 to 200 ppm	0.62 to 200 ppm (as N)
Resolution	0.01 pH / 0.1 mV	0.1 mV	0.01 ppm to 1 ppm; 0.1 ppm to 200 ppm		
Accuracy	±0.02 pH / ±0.5 mV	±1.0 mV	±5% of reading or 2 ppm, whichever is greater		
Conductivity		TDS	Resistivity	Salinity	Seawater σ
Range	0 to 200 mS/cm (absolute EC up to 400 mS/cm)	0 to 400000 mg/L or ppm (the maximum value depends on the TDS factor)	0 to 999999 Ω•cm; 0 to 1000.0 kΩ•cm; 0 to 1.0000 MΩ•cm	0.00 to 70.00 PSU	0 to 50.0 σ <sub>T</sub> , σ <sub>0</sub> , σ <sub>15</sub>
Resolution	manual: 1 μS/cm; 0.001 mS/cm; 0.01 mS/cm; 0.1 mS/cm; 1 mS/cm;	manual: 1 mg/L (ppm); 0.001 g/L (ppt); 0.01g/L (ppt); 0.1 g/L (ppt); 1 g/L (ppt);	dependent on resistivity reading	0.01 PSU	0.1 σ <sub>T</sub> , σ <sub>0</sub> , σ <sub>15</sub>
	automatic: 1 μS/cm from 0 to 9999 μS/cm; 0.01 mS/cm from 10.00 to 99.99 mS/cm; 0.1 mS/cm from 100.0 to 400.0 mS/cm;	autorange scales: 1 mg/L (ppm) from 0 to 9999 mg/L (ppm); 0.01 g/L (ppt) from 10.00 to 99.99 g/L (ppt); 0.1 g/L (ppt) from 100.0 to 400.0 g/L (ppt);			
	automatic mS/cm: 0.001 mS/cm from 0.000 to 9.999 mS/cm; 0.01 mS/cm from 10.00 to 99.99 mS/cm; 0.1 mS/cm from 100.0 to 400.0 mS/cm	autorange g/L (ppt) scales: 0.001 g/L (ppt) from 0.000 to 9.999 g/L (ppt); 0.01 g/L (ppt) from 10.00 to 99.99 g/L (ppt); 0.1 g/L (ppt) from 100.0 to 400.0 g/L (ppt)			
Accuracy	±1% of reading or ±1 μS/cm, whichever is greater	±1% of reading or ±1 mg/L, whichever is greater	±2% of reading or ±0.01 PSU, whichever is greater		±1 σ <sub>T</sub> , σ <sub>0</sub> , σ <sub>15</sub>
Turbidity		Dissolved Oxygen	Atm. Pressure	Temperature	
Range	0.0 to 99.9 FNU; 100 to 1000 FNU	0.0 to 500.0%; 0.00 to 50.00 ppm	450 to 850 mm Hg; 17.72 to 33.46 in Hg; 600.0 to 1133.2 mbar; 8.702 to 16.436 psi; 0.5921 to 1.1184 atm; 60.00 to 113.32 kPa	-5.00 to 55.00°C; 23.00 to 131.00°F; 268.15 to 328.15K	
Resolution	0.1 FNU from 0.0 to 99.9 FNU; 1 FNU from 100 to 1000 FNU	0.1%; 0.01 ppm	0.1 mm Hg; 0.01 in Hg; 0.1 mbar; 0.001 psi; 0.0001 atm; 0.01 kPa	0.01°C; 0.01°F; 0.01K	
Accuracy	±0.3 FNU or ±2% of reading, whichever is greater	0.0 to 300.0%: ±1.5% of reading or ±1.0% whichever is greater; 300.0 to 500.0%: ±3% of reading; 0.00 to 30.00 ppm: ±1.5% of reading or 0.10 ppm, whichever is greater; 30.00 ppm to 50.00 ppm: ±3% of reading	±3 mm Hg within ±15°C from the temperature during calibration	±0.15°C; ±0.27°F; ±0.15K	

**ORDERING INFORMATION**

Sensors for all meter and probe configurations are sold separately. Choose your configuration below:

**METER ONLY, CARTON BOX PACKAGING**

HI 9829-01	Meter only, charging adapter and instruction manual, 115VAC
HI 9829-02	Same as HI 9829-01, for 230VAC
HI 98290-01	Meter only with GPS, charging adapter and instruction manual, 115VAC
HI 98290-02	Same as HI 98290-01, for 230VAC

**METER AND PROBE ONLY, NO SENSORS, CARRYING CASE PACKAGING**

HI 98291-01	HI 9829 and HI 7629829/4 logging probe for pH/pH+ORP/ISE, DO, EC, temperature, with 4 m (13.1') cable, probe maintenance kit, charging adapter, instruction manual and hard carrying case, 115VAC
HI 98291-02	Same as HI 98291-01, for 230VAC
HI 98292-01	HI 9829 and HI 7639829/4 logging probe for pH/pH+ORP/ISE, DO, EC+turbidity, temperature, with 4 m (13.1') cable, probe maintenance kit, charging adapter, instruction manual and hard carrying case, 115VAC
HI 98292-02	Same as HI 98292-01, for 230VAC
HI 98293-01	HI 9829 and HI 7629829/10 logging probe for pH/pH+ORP/ISE, DO, EC, temperature, with 10 m (33') cable, probe maintenance kit, charging adapter, instruction manual and hard carrying case, 115VAC
HI 98293-02	Same as HI 98293-01, for 230VAC
HI 98294-01	HI 9829 and HI 7639829/10 logging probe for pH/pH+ORP/ISE, DO, EC+turbidity, temperature, with 10 m (33') cable, probe maintenance kit, charging adapter, instruction manual and hard carrying case, 115VAC
HI 98294-02	Same as HI 98294-01, for 230VAC
HI 98295-01	HI 98290 with GPS and HI 7629829/4 logging probe for pH/pH+ORP/ISE, DO, EC, temperature, with 4 m (13.1') cable, probe maintenance kit, charging adapter, instruction manual and hard carrying case, 115VAC
HI 98295-02	Same as HI 98295-01, for 230VAC
HI 98296-01	HI 98290 with GPS and HI 7639829/4 logging probe for pH/pH+ORP/ISE, DO, EC+turbidity, temperature, with 4 m (13.1') cable, probe maintenance kit, charging adapter, instruction manual and hard carrying case, 115VAC
HI 98296-02	Same as HI 98296-01, for 230VAC
HI 98297-01	HI 98290 with GPS and HI 7629829/10 logging probe for pH/pH+ORP/ISE, DO, EC, temperature, with 10 m (33') cable, probe maintenance kit, charging adapter, instruction manual and hard carrying case, 115VAC
HI 98297-02	Same as HI 98297-01, for 230VAC

HI 98298-01	HI 98290 with GPS and HI 7639829/10 logging probe for pH/pH+ORP/ISE, DO, EC+turbidity, temperature, with 10 m (33') cable, probe maintenance kit, charging adapter, instruction manual and hard carrying case, 115VAC
HI 98298-02	Same as HI 98298-01, for 230VAC

**PROBE ONLY, NO SENSORS, CARTON BOX PACKAGING**

HI 7609829/4	Probe for pH/pH+ORP/ISE, DO, EC, temperature with HI 7698295 short protective shield and 4 m (13.1') cable
HI 7609829/10	Probe for pH/pH+ORP/ISE, DO, EC, temperature with HI 7698295 short protective shield and 10 m (33') cable
HI 7619829/4	Probe for pH/pH+ORP/ISE, DO, EC+turbidity, temperature, with HI 7698296 long protective shield and 4 m (13.1') cable
HI 7619829/10	Probe for pH/pH+ORP/ISE, DO, EC+turbidity, temperature, with HI 7698296 long protective shield and 10 m (33') cable
HI 7629829/4	Logging probe for pH/pH+ORP/ISE, DO, EC, temperature with HI 7698295 short protective shield and 4 m (13.1') cable
HI 7629829/10	Logging probe for pH/pH+ORP/ISE, DO, EC, temperature with HI 7698295 short protective shield and 10 m (33') cable
HI 7639829/4	Logging probe for pH/pH+ORP/ISE, DO, EC+turbidity, temperature, with HI 7698296 long protective shield, and 4 m (13.1') cable
HI 7639829/10	Logging probe for pH/pH+ORP/ISE, DO, EC+turbidity, temperature, with HI 7698296 long protective shield, and 10 m (33') cable

**SENSORS WITH O-RING**

HI 7609829-0	pH
HI 7609829-1	pH/ORP
HI 7609829-2	Dissolved oxygen
HI 7609829-3	EC
HI 7609829-4	EC/Turbidity
HI 7609829-10	Ammonium ISE
HI 7609829-11	Chloride ISE
HI 7609829-12	Nitrate ISE

**QUICK CALIBRATION SOLUTIONS**

HI 9828-25	Quick calibration solution, 500 mL
HI 9828-27	Quick calibration solution, 1 gal.

**pH CALIBRATION SOLUTIONS**

HI 7004L	pH 4.01 buffer solution, 500 mL
HI 7007L	pH 7.01 buffer solution, 500 mL
HI 7010L	pH 10.01 buffer solution, 500 mL

**ORP CALIBRATION SOLUTIONS**

HI 7021L	ORP test solution @240 mV, 500 mL
HI 7022L	ORP test solution @470 mV, 500 mL

**CONDUCTIVITY CALIBRATION SOLUTIONS**

HI 7030L	12880 µS/cm cal. sol., 500 mL
HI 7031L	1413 µS/cm cal. sol., 500 mL
HI 7033L	84 µS/cm cal. sol., 500 mL

HI 7034L	80000 µS/cm cal. sol., 500 mL
HI 7035L	111800 µS/cm cal. sol., 500 mL
HI 7039L	5000 µS/cm cal. sol., 500 mL

**DISSOLVED OXYGEN SOLUTIONS**

HI 7040L	Zero oxygen solution, 500 mL
HI 7042S	Electrolyte solution, 30 mL

**TURBIDITY CALIBRATION SOLUTIONS**

HI 9829-16	0 FNU calibration solution, 230 mL
HI 9829-17	20 FNU calibration solution, 230 mL
HI 9829-18	200 FNU calibration solution, 230 mL

**ISE STANDARDS**

HI 9829-10/11	Kit containing 10 sachets each of 10 ppm and 100 ppm standard for HI 7609829-10 ammonium ISE
HI 9829-10	10 ppm standard sachet for HI 7609829-10 ammonium ISE, 25 mL (25)
HI 9829-11	100 ppm standard sachet for HI 7609829-10 ammonium ISE, 25 mL (25)
HI 9829-12/13	Kit containing 10 sachets each of 10 ppm and 100 ppm standard for HI 7609829-11 chloride ISE
HI 9829-12	10 ppm standard sachet for HI 7609829-11 chloride ISE, 25 mL (25)
HI 9829-13	100 ppm standard sachet for HI 7609829-11 chloride ISE, 25 mL (25)
HI 9829-14/15	Kit containing 10 sachets each of 10 ppm and 100 ppm standard for HI 7609829-12 nitrate ISE
HI 9829-14	10 ppm standard sachet for HI 7609829-12 nitrate ISE, 25 mL (25)
HI 9829-15	100 ppm standard sachet for HI 7609829-12 nitrate ISE, 25 mL (25)

**PROBE MAINTENANCE KIT**

HI 7698292	Probe maintenance kit consisting of HI 7042S (electrolyte solution for DO sensor), O-rings for DO sensor (5), small brush, O-rings for probe (5), and syringe with grease to lubricate the O-rings.
------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

**pH/ORP CLEANING AND STORAGE SOLUTIONS**

HI 70300L	pH/ORP electrode storage sol., 500 mL
HI 7061L	pH/ORP electrode cleaning sol., 500 mL

**ACCESSORIES**

HI 929829	PC application software
HI 7698291	USB cable, PC to meter
HI 76982910	USB cable, PC to probe
HI 710046	Cigarette lighter cable
HI 7698290	Short calibration beaker
HI 7698293	Long calibration beaker
HI 7698294	Short flow cell
HI 7698297	Long, quick release flow cell
HI 7698295	Short protective shield
HI 7698296	Long protective shield
HI 920005	iButton® with holder (5 pcs)
HI 710140	Hard carrying case
HI 710045	Power supply cable

For a complete list of Solutions, see the end of pH Section 3, ISE Section 4, Conductivity Section 6, Dissolved Oxygen Section 7 and Turbidity Section 12.



HI 9828

## GPS Multiparameter Meter

- Display up to 12 parameters
- Track measurement locations with GPS
- Waterproof protection for meter (IP67) and probe (IP68)
- Fast Tracker™–Tag I.D. System simplifies test logging
- Graphic LCD with backlight
- Built-in barometer for DO compensation
- Quick calibration feature
- Measurement check eliminates erroneous readings
- Auto recognition of pH and pH/ORP probe
- Logger function records the data of all connected sensors
- Log on demand and automatic logging (up to 60,000 samples)
- Logged data can be displayed as graphs
- USB for PC connectivity
- Autorange of EC and TDS readings
- Good Laboratory Practice feature with last 5 calibrations recorded
- Field replaceable sensors
- Meter accepts both alkaline and rechargeable batteries
- Rugged probe with stainless steel tip has a diameter under 2" for wells and pipes

Measure pH, pH/mV, ORP, % saturation DO, mg/L DO, EC, absolute EC, resistivity, TDS, salinity, seawater specific gravity, atmospheric pressure and temperature

The HI 9828 multiparameter meter with GPS receiver monitors up to 13 different water quality parameters (6 measured, 7 calculated). Measurements include pH, pH/mV, ORP, % saturation DO, mg/L DO, EC, absolute EC, resistivity, TDS, salinity, seawater specific gravity, atmospheric pressure and temperature.

Measurements from specific locations are tracked with detailed coordinate information that can be viewed immediately on the display. GPS information can be transferred to a PC using HANNA's HI 929828 software. GPS information can also be viewed by GPS mapping software such as Google™ maps\*. Clicking on visited locations using mapping software such as Google™ Maps displays measurement information. The built-in 12 channel GPS receiver and antenna guarantees a position accuracy of 30 ft (10 m).

For measuring points within a 30 ft range or where GPS signals are not available, HI 9828's Fast Tracker™ is invaluable for associating measurements with their locations.




HANNA's exclusive Fast Tracker™–Tag I.D. System monitors and records data using iButton®s that can be installed at any number of sampling sites.

The HI 9828 has a graphic, backlit LCD that automatically sizes the digits to fit the screen and allows full configuration of each parameter measured along with on-screen graphing capability. The meter incorporates comprehensive GLP features and the downloading of data via USB connection.


Each parameter is supported by on-screen context sensitive help, both in the calibration mode and during measurement.

Designed for outdoor environments, the meter is impact resistant and waterproof meeting IP67 standards (30 minutes immersion under 1 m of water). The multi-sensor probe can be left underwater in accordance with IP68 standards.

## Fully Configurable Measurement Screen

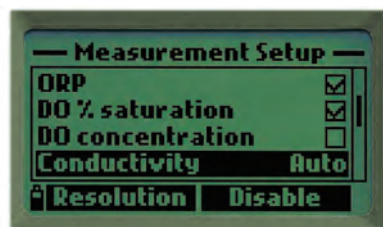


## Intuitive Configuration, Measurement and Help

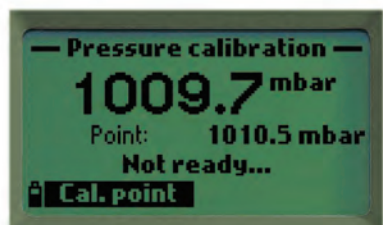

### Pressure

Atmospheric pressure calibration and measurement can be made in a choice of units.

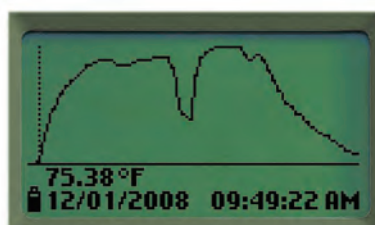

### Graphing


Trend graphing may be viewed on the display or transferred to a PC. The sample date and time stamp will also be displayed.



### Help

The context sensitive help screen is always accessible.

## Quick Calibration

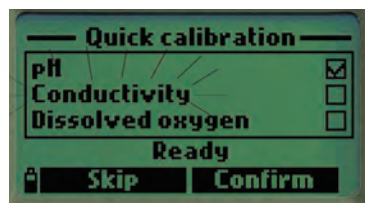

### Quick calibration

In the field, the Quick Calibration feature verifies probe functionality and calibration with a single calibration solution (HI 9828-25). Simply screw the calibration beaker filled with solution onto the probe, select "Quick calibration" from the menu and press OK. Individual calibration may also be performed using multiple calibration points.

### Field ready

For field calibration, our quick calibration solution allows users to standardize pH and conductivity with one solution.



## HI 769828 Multiparameter, Intelligent Probe

HANNA's HI 769828 multiparameter probe incorporates a built-in microprocessor and amplifier that convert the high impedance signals from the sensors of the probe to eliminate common problems such as cable length limitations and noise associated with high impedance signals. This allows the probe to have a reliable communication with the meter and also immediately warns the user of problems such as a broken cable. The standard cable lengths of the probe are 4, 10 and 20 meters (13, 32 and 64 feet) and custom lengths are also available.

The probe also features HANNA's Quick Calibration which allows the user to calibrate pH and conductivity with one solution in a single, simple step. Dissolved oxygen is also calibrated in one step in saturated air. The probe houses 5 of the 6 measured parameters: pH, ORP, EC, dissolved oxygen and temperature. The sensors are all independently replaceable and are easy to maintain and keep clean. The sensors are protected by an outer PVC/stainless steel sleeve and cap which is suitable for use in 2" wells. The probe housing complies with IP68 standard.



Sensor replacement is quick and easy with screw type connectors and color coded sensors.

The Galvanic DO sensor does not require polarization time so it's ready at a moment's notice.

The 4-ring conductivity system ensures stable conductivity readings that are immune to surface coating. Absolute conductivity, temperature corrected conductivity, salinity, specific gravity and TDS determinations are possible with measurements from this sensor.


The HI 9828 automatically recognizes the presence of either the pH or pH/ORP sensor.

Both sensors have a cloth junction which allows greater sensitivity, and are gel filled for improved resistance to contamination.

The meter also displays pH in mV readings—ideal for troubleshooting.

### HI 9828 is supplied complete with a probe maintenance kit.

This kit includes HI 7042S (electrolyte solution for DO sensor), (5) O-rings for DO sensor, a small brush, (5) O-rings for multiparameter probe and a syringe with grease to lubricate the O-rings.

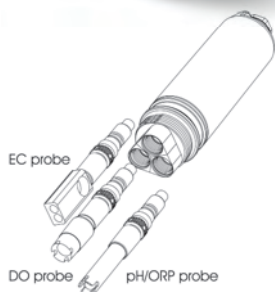

### PROBE REORDER INFORMATION

**HI 769828** pH/ORP, EC, DO, temperature multisensor probe with cable.

Configure your HI 769828:

<b>HI 769828/4</b>	DO/EC/°C probe with 4 m cable
<b>HI 769828/10</b>	DO/EC/°C probe with 10 m cable
<b>HI 769828/20</b>	DO/EC/°C probe with 20 m cable
<b>HI 769828/30</b>	DO/EC/°C probe with 30 m cable
<b>HI 769828/40</b>	DO/EC/°C probe with 40 m cable
<b>HI 769828/50</b>	DO/EC/°C probe with 50 m cable
<b>HI 769828/60</b>	DO/EC/°C probe with 60 m cable
<b>HI 769828/70</b>	DO/EC/°C probe with 70 m cable
<b>HI 769828/80</b>	DO/EC/°C probe with 80 m cable
<b>HI 769828/90</b>	DO/EC/°C probe with 90 m cable
<b>HI 769828/100</b>	DO/EC/°C probe with 100 m cable



## GPS (Global Positioning System) Enabled

The new HI 9828 features an internal 12 channel GPS receiver and antenna that calculates its position to track locations along with measurement data. The GPS tracks your location using satellites to within 30 ft (10 m).

GPS coordinates are shown on the LCD with up to 10 measurement parameters. The LCD also displays the GPS signal strength, number of satellites and logged data embedded with GPS coordinates.


Users can associate GPS coordinates with alphanumeric locations and distances between current location and predefined locations are displayed arranged by distance. In the case of GPS signal loss, the HI 9828 memorizes the last location and time.

HI 929828 PC Software manages logged data from the HI 9828 and displays GPS coordinates along with logged data.


Date	Time	Salinity	pH	DO	GPS
2008-02-14	10:00:00	24.00	7.20	1.00	41°59'48.6"N 71°28'36.1"W
2008-02-14	10:01:00	24.00	7.20	1.00	41°59'48.6"N 71°28'36.1"W
2008-02-14	10:02:00	24.00	7.20	1.00	41°59'48.6"N 71°28'36.1"W
2008-02-14	10:03:00	24.00	7.20	1.00	41°59'48.6"N 71°28'36.1"W
2008-02-14	10:04:00	24.00	7.20	1.00	41°59'48.6"N 71°28'36.1"W
2008-02-14	10:05:00	24.00	7.20	1.00	41°59'48.6"N 71°28'36.1"W
2008-02-14	10:06:00	24.00	7.20	1.00	41°59'48.6"N 71°28'36.1"W
2008-02-14	10:07:00	24.00	7.20	1.00	41°59'48.6"N 71°28'36.1"W
2008-02-14	10:08:00	24.00	7.20	1.00	41°59'48.6"N 71°28'36.1"W
2008-02-14	10:09:00	24.00	7.20	1.00	41°59'48.6"N 71°28'36.1"W
2008-02-14	10:10:00	24.00	7.20	1.00	41°59'48.6"N 71°28'36.1"W
2008-02-14	10:11:00	24.00	7.20	1.00	41°59'48.6"N 71°28'36.1"W
2008-02-14	10:12:00	24.00	7.20	1.00	41°59'48.6"N 71°28'36.1"W
2008-02-14	10:13:00	24.00	7.20	1.00	41°59'48.6"N 71°28'36.1"W
2008-02-14	10:14:00	24.00	7.20	1.00	41°59'48.6"N 71°28'36.1"W
2008-02-14	10:15:00	24.00	7.20	1.00	41°59'48.6"N 71°28'36.1"W
2008-02-14	10:16:00	24.00	7.20	1.00	41°59'48.6"N 71°28'36.1"W
2008-02-14	10:17:00	24.00	7.20	1.00	41°59'48.6"N 71°28'36.1"W
2008-02-14	10:18:00	24.00	7.20	1.00	41°59'48.6"N 71°28'36.1"W
2008-02-14	10:19:00	24.00	7.20	1.00	41°59'48.6"N 71°28'36.1"W
2008-02-14	10:20:00	24.00	7.20	1.00	41°59'48.6"N 71°28'36.1"W
2008-02-14	10:21:00	24.00	7.20	1.00	41°59'48.6"N 71°28'36.1"W
2008-02-14	10:22:00	24.00	7.20	1.00	41°59'48.6"N 71°28'36.1"W
2008-02-14	10:23:00	24.00	7.20	1.00	41°59'48.6"N 71°28'36.1"W
2008-02-14	10:24:00	24.00	7.20	1.00	41°59'48.6"N 71°28'36.1"W
2008-02-14	10:25:00	24.00	7.20	1.00	41°59'48.6"N 71°28'36.1"W
2008-02-14	10:26:00	24.00	7.20	1.00	41°59'48.6"N 71°28'36.1"W
2008-02-14	10:27:00	24.00	7.20	1.00	41°59'48.6"N 71°28'36.1"W
2008-02-14	10:28:00	24.00	7.20	1.00	41°59'48.6"N 71°28'36.1"W
2008-02-14	10:29:00	24.00	7.20	1.00	41°59'48.6"N 71°28'36.1"W
2008-02-14	10:30:00	24.00	7.20	1.00	41°59'48.6"N 71°28'36.1"W

## Track Measurement Locations


Users can connect to GPS tracking software such as Google™ Maps\* to view locations where samples have been taken. Measurement information is shown right on the map.

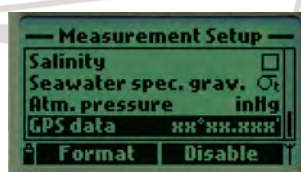


GPS data can be customized to meet specific requirements.

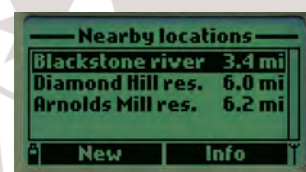

Displays distances between current location and predefined locations.

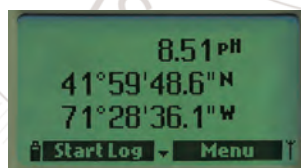



Display current readings along with GPS coordinates

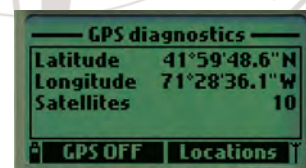

Shows current position and number of satellites.



**FastTracker™**  
A new revolution in organized data management

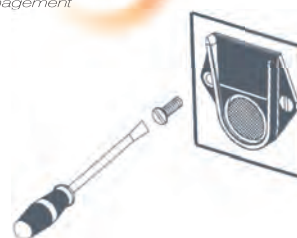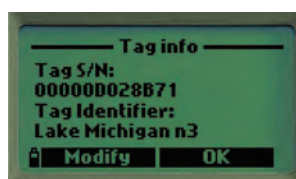

### Fast Tracker™–Tag Identification System

HANNA's Fast Tracker™–Tag Identification System simplifies test logging. iButton®s with a unique ID can be installed at various sampling sites. When the matching connector on the meter contacts the location button, measurements are logged and labeled with the alphanumeric user entered location ID. Location, date, time and measurements are logged into the meter which can be transferred to a PC. The Fast Tracker™ system complements the GPS for ultimate tracking.

\*Google™ is a registered trademark of Google™, inc. HANNA Instruments® has no affiliation with Google™.

## HI 9828 • GPS Multiparameter Meter

SPECIFICATIONS		HI 9828
pH	Range	0.00 to 14.00 pH
	Resolution	0.01 pH
	Accuracy	±0.02 pH
mV of pH Input	Range	±600.0 mV
	Resolution	0.1 mV
	Accuracy	±0.5 mV
ORP	Range	±2000.0 mV
	Resolution	0.1 mV
	Accuracy	±1.0 mV
Dissolved Oxygen	Range	0.0 to 500.0% / 0.00 to 50.00 mg/L
	Resolution	0.1% / 0.01 mg/L
	Accuracy	0.0 to 300.0%: ±1.5% of reading or ±1.0% whichever is greater; 300.0 to 500.0%: ±3% of reading; 0.00 to 30.00 mg/L: ±1.5% of reading or 0.10 mg/L whichever is greater; 30.00 mg/L to 50.00 mg/L: ±3% of reading
Conductivity	Range	0.000 to 200.000 mS/cm (absolute EC up to 400 mS/cm)
	Resolution	manual: 1 µS/cm; 0.001 mS/cm; 0.01 mS/cm; 0.1 mS/cm; 1 mS/cm; automatic: 1 µS/cm from 0 to 9999 µS/cm; 0.01 mS/cm from 10.00 to 99.99 mS/cm; 0.1 mS/cm from 100.0 to 400.0 mS/cm; automatic mS/cm: 0.001 mS/cm from 0.000 to 9.999 mS/cm; 0.01 mS/cm from 10.00 to 99.99 mS/cm; 0.1 mS/cm from 100.0 to 400.0 mS/cm
	Accuracy	±1% of reading or ±1 µS/cm whichever is greater
Resistivity	Range	0 to 999999 Ω•cm; 0 to 1000.0 kΩ•cm; 0 to 1.0000 MΩ•cm
	Resolution	dependent on resistivity reading
TDS	Range	0 to 400000 mg/L or ppm (the maximum value depends on the TDS factor)
	Resolution	manual: 1 mg/L (ppm); 0.001 g/L (ppt); 0.01 g/L (ppt); 0.1 g/L (ppt); 1 g/L (ppt); autorange scales: 1 mg/L (ppm) from 0 to 9999 mg/L (ppm); 0.01 g/L (ppt) from 10.00 to 99.99 g/L (ppt); 0.1 g/L (ppt) from 100.0 to 400.0 g/L (ppt); autorange g/L (ppt) scales: 0.001 g/L (ppt) from 0.000 to 9.999 g/L (ppt); 0.01 g/L (ppt) from 10.00 to 99.99 g/L (ppt); 0.1 g/L (ppt) from 100.0 to 400.0 g/L (ppt)
	Accuracy	±1% of reading or ±1 mg/L (ppm) whichever is greater
Salinity	Range	0.00 to 70.00 PSU (Extended Practical Salinity Scale)
	Resolution	0.01 PSU
	Accuracy	±2% of reading or 0.01 PSU whichever is greater
Seawater Specific Gravity	Range	0.0 to 50.0 σ <sub>t</sub> , σ <sub>0</sub> , σ <sub>15</sub>
	Resolution	0.1 σ <sub>t</sub> , σ <sub>0</sub> , σ <sub>15</sub>
	Accuracy	±1 σ <sub>t</sub> , σ <sub>0</sub> , σ <sub>15</sub>
Atm. Pressure	Range	450 to 850 mmHg; 17.72 to 33.46 inHg; 600.0 to 1133.2 mbar; 8.702 to 16.436 psi; 0.5921 to 1.1184 atm; 60.00 to 113.32 kPa
	Resolution	0.1 mmHg; 0.01 inHg; 0.1 mbar; 0.001 psi; 0.0001 atm; 0.01 kPa
	Accuracy	±3 mmHg within ±15°C from the calibration temperature
Temperature	Range	-5.00 to 55.00°C; 23.00 to 131.00°F; 268.15 to 328.15K
	Resolution	0.01°C; 0.01°F; 0.01K
	Accuracy	±0.15°C; ±0.27°F; ±0.15K
Calibration	pH	automatic one, two, or three points with five memorized standard buffers (pH 4.01, 6.86, 7.01, 9.18, 10.01) or one custom buffer
	ORP	automatic at one custom point
	Conductivity	automatic one point with six memorized standards (84 µS/cm, 1413 µS/cm, 5.00 mS/cm, 12.88 mS/cm, 80.0 mS/cm, 111.8 mS/cm) or custom point
	DO	automatic one or two points at 0, 100% or one custom point
	Resistivity, TDS, σ	based on conductivity or salinity calibration
	Salinity	one custom point
	Atm. Pressure, Temp.	automatic at one custom point
	Temperature Compensation	automatic from -5 to 55°C (23 to 131°F)
Logging Memory		up to 60,000 samples with 13 measurements each; Up to 45,000 samples with 15 measurements each (GPS)
Logging Interval		1 second to 3 hours
Computer Interface		USB (with HI 929829 software)
Waterproof Protection		meter IP67, probe IP68
Environment		0 to 50°C (32 to 122°F); RH 100%
Power Supply		1.5V alkaline C cells (approximately 150 hours of continuous use without backlight) (4) / 1.2V rechargeable C cells (approximately 70 hours of continuous use without backlight) (4)
Dimensions Meter / Probe		221 x 115 x 55 mm (8.7 x 4.5 x 2.2") / 270 x 46 mm DIA (10.6 x 1.8" DIA)
Weight		meter: 750g (26.5 oz.); probe: 750g (26.5 oz.)

## HI 9828 • GPS Multiparameter Meter



## ORDERING INFORMATION

HI 9828 configurations are supplied with HI 769828 multisensor probe (pH/ORP, EC, DO, temperature), HI 9828-25 quick calibration standard solution (500 mL), probe maintenance kit, rechargeable C size Ni-MH batteries (4), power adapter & cable, car 12V accessory outlet adapter, HI 7698281 USB interface cable, HI 9828 Windows® compatible software and instruction manual in a rugged carrying case.

Choose your configuration below:

HI 982804-01	HI 9828 with GPS and 4 m (13.1') probe cable, 115VAC
HI 982804-02	HI 9828 with GPS and 4 m (13.1') probe cable, 230VAC
HI 9828010-01	HI 9828 with GPS and 10 m (33') probe cable, 115VAC
HI 9828010-02	HI 9828 with GPS and 10 m (33') probe cable, 230VAC
HI 9828020-01	HI 9828 with GPS and 20 m (66') probe cable, 115VAC
HI 9828020-02	HI 9828 with GPS and 20 m (66') probe cable, 230VAC
HI 9828030-01	HI 9828 with GPS and 30 m (98') probe cable, 115VAC
HI 9828030-02	HI 9828 with GPS and 30 m (98') probe cable, 230VAC
HI 9828040-01	HI 9828 with GPS and 40 m (131') probe cable, 115VAC
HI 9828040-02	HI 9828 with GPS and 40 m (131') probe cable, 230VAC
HI 9828050-01	HI 9828 with GPS and 50 m (164') probe cable, 115VAC
HI 9828050-02	HI 9828 with GPS and 50 m (164') probe cable, 230VAC
HI 9828060-01	HI 9828 with GPS and 60 m (200') probe cable, 115VAC
HI 9828060-02	HI 9828 with GPS and 60 m (200') probe cable, 230VAC
HI 9828070-01	HI 9828 with GPS and 70 m (230') probe cable, 115VAC
HI 9828070-02	HI 9828 with GPS and 70 m (230') probe cable, 230VAC
HI 9828080-01	HI 9828 with GPS and 80 m (262') probe cable, 115VAC
HI 9828080-02	HI 9828 with GPS and 80 m (262') probe cable, 230VAC
HI 9828090-01	HI 9828 with GPS and 90 m (295') probe cable, 115VAC
HI 9828090-02	HI 9828 with GPS and 90 m (295') probe cable, 230VAC
HI 98280100-01	HI 9828 with GPS and 100 m (328') probe cable, 115VAC
HI 98280100-02	HI 9828 with GPS and 100 m (328') probe cable, 230VAC

HI 9828/4-01	HI 9828 and 4 m (13.1') probe cable, no GPS, 115VAC
HI 9828/4-02	HI 9828 and 4 m (13.1') probe cable, no GPS, 230VAC
HI 9828/10-01	HI 9828 and 10 m (33') probe cable, no GPS, 115VAC
HI 9828/10-02	HI 9828 and 10 m (33') probe cable, no GPS, 230VAC
HI 9828/20-01	HI 9828 and 20 m (66') probe cable, no GPS, 115VAC
HI 9828/20-02	HI 9828 and 20 m (66') probe cable, no GPS, 230VAC
HI 9828/30-01	HI 9828 with GPS and 30 m (98') probe cable, no GPS, 115VAC
HI 9828/30-02	HI 9828 and 30 m (98') probe cable, no GPS, 230VAC
HI 9828/40-01	HI 9828 and 40 m (131') probe cable, no GPS, 115VAC
HI 9828/40-02	HI 9828 and 40 m (131') probe cable, no GPS, 230VAC
HI 9828/50-01	HI 9828 and 50 m (164') probe cable, no GPS, 115VAC
HI 9828/50-02	HI 9828 and 50 m (164') probe cable, no GPS, 230VAC
HI 9828/60-01	HI 9828 and 60 m (200') probe cable, no GPS, 115VAC
HI 9828/60-02	HI 9828 and 60 m (200') probe cable, no GPS, 230VAC
HI 9828/70-01	HI 9828 and 70 m (230') probe cable, no GPS, 115VAC
HI 9828/70-02	HI 9828 and 70 m (230') probe cable, no GPS, 230VAC
HI 9828/80-01	HI 9828 and 80 m (262') probe cable, no GPS, 115VAC
HI 9828/80-02	HI 9828 and 80 m (262') probe cable, no GPS, 230VAC
HI 9828/90-01	HI 9828 and 90 m (295') probe cable, no GPS, 115VAC
HI 9828/90-02	HI 9828 and 90 m (295') probe cable, no GPS, 230VAC
HI 9828/100-01	HI 9828 and 100 m (328') probe cable, no GPS, 115VAC
HI 9828/100-02	HI 9828 and 100 m (328') probe cable, no GPS, 230VAC

Longer probe cable lengths are available

## QUICK CALIBRATION SOLUTIONS

HI 9828-25	Quick calibration solution, 500 mL
HI 9828-27	Quick calibration solution, 1 G

## CLEANING AND MAINTENANCE SOL.

HI 70300L	Electrode storage solution, 500 mL
HI 7061L	Electrode cleaning solution, 500 mL

## pH CALIBRATION SOLUTIONS

HI 7004L	pH 4.01 buffer solution, 500 mL
HI 7007L	pH 7.01 buffer solution, 500 mL
HI 7010L	pH 10.01 buffer solution, 500 mL

## ORP CALIBRATION SOLUTIONS

HI 7021L	ORP test solution @240 mV, 500 mL
HI 7022L	ORP test solution @470 mV, 500 mL

## DISSOLVED OXYGEN SOLUTIONS

HI 7040L	Zero oxygen solution, 500 mL
HI 7042S	Electrolyte solution, 30 mL

## CONDUCTIVITY CALIBRATION SOL.

HI 7030L	12880 µS/cm solution, 500 mL
HI 7031L	1413 µS/cm solution, 500 mL
HI 7033L	84 µS/cm solution, 500 mL
HI 7034L	80000 µS/cm solution, 500 mL
HI 7035L	111800 µS/cm solution, 500 mL
HI 7039L	5000 µS/cm solution, 500 mL



## SENSORS

HI 769828-0	pH sensor, single junction, non-refillable
HI 769828-1	pH/ORP sensor
HI 769828-2	DO sensor
HI 769828-3	EC sensor

## OTHER ACCESSORIES

HI 7698281	USB interface cable
HI 7698282	Probe maintenance kit
HI 7698283	Calibration beaker
HI 7698284	Flow cell
HI 710045	Power supply cable
HI 710046	Lighter cigarette cable
HI 929828	Software application
HI 920005	iButton® with holder (5 pcs)

For a complete list of Solutions, see the end of pH Section 3, Conductivity Section 6, and Dissolved Oxygen Section 7.



HI 991300 • HI 991301

**pH/EC/TDS/Temperature Meters**

- **Automatic one or two point calibration**
- **Multi-level LCD display**  
The meters display the current measurement simultaneously with the current temperature.
- **On-screen tutorial messages for calibration and setup**
- **HOLD**  
The HOLD button freezes readings on the display for manual recording
- **Automatic Temperature Compensation**
- **BEPS**  
(Battery Error Prevention System) alerts the user in the event that low battery power could adversely affect readings
- **Measure pH, EC/TDS and temperature with one probe**
- **Battery % displayed on startup**
- **Easy to clean and keep clean**

HI 991300 and HI 991301 have been designed to offer you pH, conductivity, total dissolved solids and temperature measurements all in a slim, lightweight, portable unit. From purified to brine water measurement, you can select the meter which will work best with your range of conductivity for greater precision.

There are only 2 buttons, yet you can select from a range of calibration buffers and even the temperature scale (°C or °F) most familiar to you. The housing is waterproof and rated for IP 67 conditions.

The HI 1288 pre-amplified multiparameter probe features an easy to clean sensor and a cloth junction that can be pulled longer to increase the life of the probe. To ensure against interference from transient electrical noise, a solid-state amplifier is integrated into the HI 1288.

User selectable features include different TDS factors from 0.45 to 1.00 and a range of temperature coefficients ( $\beta$ ) from 0.0 to 2.4% for greater consistency and reproducibility. Standardized buffer recognition values are also selectable.

These instruments easily fit in the palm of your hand and the bottom probe connection ensures the electrode cable doesn't get in your way. The large, multi-level LCD displays the primary reading, temperature and calibration guides simultaneously.





## HI 1288 Multiparameter Probe and Protective Boot

The HI 1288 multiparameter probe includes pH, EC/TDS and temperature measurement in one convenient, rugged handle. A solid-state pre-amplifier is integrated into the probe to ensure against interference from transient electrical noise.

- Amperometric conductivity probe
- Built-in temperature sensor
- Easy to clean

The sensor is easy to clean and keep clean by design

- pH sensor with extendable cloth junction

The HI 1288 multiparameter probe features a cloth junction that can be pulled longer, effectively increasing the life of the probe

### ORDERING INFORMATION

**HI 991300** is supplied with HI 1288 multiparameter probe, HI 70004 pH 4.01 buffer solution sachet, HI 70007 pH 7.01 buffer solution sachet, HI 70031 1413  $\mu\text{S/cm}$  calibration solution sachet, HI 70032 1382 mg/L (ppm) calibration solution sachet, HI 700661 electrode cleaning solution sachet, batteries, instructions and rugged carrying case.

**HI 991301** is supplied with HI 1288 multiparameter probe, HI 70004 pH 4.01 buffer sachet, HI 70007 pH 7.01 buffer sachet, HI 70030 12880  $\mu\text{S/cm}$  calibration solution sachet, HI 70038 6.44 g/L (ppt) calibration solution sachet, HI 700661 electrode cleaning solution sachet, batteries, instructions and rugged carrying case.

### ELECTRODES

**HI 1288** PVC body, pre-amplified multiparameter probe with internal temperature sensor, DIN connector and 1.2 m (3.93') cable

### SOLUTIONS

**HI 7004L** pH 4.01 buffer solution, 500 mL  
**HI 7007L** pH 7.01 buffer solution, 500 mL  
**HI 7010L** pH 10.01 buffer solution, 500 mL  
**HI 7030L** 12880  $\mu\text{S/cm}$  ( $\mu\text{mho/cm}$ ) calibration solution, 500 mL  
**HI 7031L** 1413  $\mu\text{S/cm}$  ( $\mu\text{mho/cm}$ ) calibration solution, 500 mL  
**HI 7032L** 1382 ppm (mg/L) calibration solution, 500 mL  
**HI 7038L** 6.44 ppt (g/L) calibration solution, 500 mL  
**HI 70442L** 1500 ppm calibration solution, 500 mL  
**HI 70300L** Electrode storage solution, 500 mL  
**HI 7061L** Electrode cleaning solution, 500 mL

### ACCESSORIES

**HI 710023** Orange protective rubber boot  
**HI 710024** Blue protective rubber boot

SPECIFICATIONS		HI 991300	HI 991301
Range	pH	0 to 14.00 pH	
	EC	0 to 3999 $\mu\text{S/cm}$	0.00 to 20.00 mS/cm
	TDS	0 to 2000 ppm (mg/L)	0.00 to 10.00 ppt (g/L)
	Temperature	0.0 to 60.0°C/32.0 to 140.0°F	
Resolution	pH	0.01 pH	
	EC	1 $\mu\text{S/cm}$	0.01 mS/cm
	TDS	1 ppm (mg/L)	0.01 ppt (g/L)
	Temperature	0.01°C/0.1°F	
Accuracy (@20°C/68°F)	pH	±0.01 pH	
	EC/TDS	±2% F.S.	
	Temperature	±0.5°C/±1°F	
pH Calibration		automatic, one or two point calibration with two sets of memorized buffers (Standard 4.01, 7.01, 10.01 or NIST 4.01, 6.86, 9.18)	
EC/TDS Calibration		automatic one point at: 1382 ppm (CONV=0.5) or 1500 ppm (CONV=0.7 or 1413 $\mu\text{S/cm}$	automatic one point at: 6.44 ppt (CONV=0.5) or 9.02 ppt (CONV=0.7) or 12880 $\mu\text{S/cm}$
Temperature Compensation	pH	automatic	
	EC/TDS	automatic with $\beta$ selectable from 2.4%/°C with 0.1 increments	
TDS Conversion Factor		selectable from 0.45 to 1.00 with 0.01 increments (default 0.50)	
Probe (included)		HI 1288 PVC body, pre-amplified multiparameter probe with internal temperature sensor, DIN connector and 1.2 m (3.93') cable	
Battery Type/Life		1.5V AAA (3) /approximately 500 hours of continuous use, auto-off after 8 minutes of inactivity	
Environment		0 to 50°C (32 to 122°F); RH max. 100%	
Dimensions		152 x 58 x 30 mm (6.0 x 2.3 x 1.2")	
Weight		205g (7.2 oz.)	

For a complete list of Solutions, see the end of pH Section 3 and Conductivity Section 6.

HI 9813-5 • HI 9813-6

## pH/EC/TDS/Temperature Portable Meter

- **Water resistant**
- **On-screen tutorial messages for calibration**
- **Exclusive CAL CHECK™ feature**  
Alerts users of calibration status (HI 9813-6 only)
- **BEPS**  
(Battery Error Prevention System) alerts the user in the event that low battery power could adversely affect readings
- **Switch parameters at the touch of a button**
- **Automatic Temperature Compensation**  
For pH and conductivity
- **Simple calibration**  
Dials located on the front panel makes calibration quick and simple, even for non-technical users
- **Battery % displayed on startup**
- **Fast response multiparameter probe**

HI 9813-5 and HI 9813-6 are versatile, water resistant, multiparameter portable instruments specifically designed for agricultural applications such as hydroponics, greenhouses, farming and nurseries.

This series of instruments feature an large LCD that clearly displays the parameter being measured as well as calibration instructions. Calibration is fast and easy with knobs located on the front panel of the instrument.

HI 9813-5 is a pH/EC/TDS meter designed for simplicity of use in taking pH, mS/cm, ppm and temperature in the °C scale measurements.

HI 9813-6 includes all the features of the HI 9813-5 while incorporating our exclusive CAL CHECK™ feature. CAL CHECK™ allows the user to easily check the pH probe calibration status at any time.

Both instruments utilize the HI 1285 series pH/EC/TDS/temperature probe. This probe features a fiber junction and gel electrolyte making it ideal for fertilizer solutions.



### HI 9813-6 Exclusive CAL CHECK™ Feature

When used in conjunction with the HI 1285-6 pH/EC/TDS/temperature probe and HI 50021 check solution, the HI 9813-6's CAL CHECK™ feature allows the user to check the meter calibration status at any time with a simple procedure:

- 1) **Rinse the probe with water and immerse the probe in HI 50021 check solution.**
- 3) **Press the check key.**
- 4) **If the meter is calibrated "probe is OK" message is displayed.**
- 5) **If cleaning is needed "clean probe and calibrate" message is displayed**

If cleaning is needed just immerse the probe in HI 700661 cleaning solution for 5 minutes, rinse the probe and check again. Calibration is needed if "clean probe and calibrate" message is displayed a second time.







- **Protective rubber boot**  
The optional rubber boot helps protect your meter

## HI 1285 Series Probe

The specially engineered HI 1285-5 and HI 1285-6 pH/EC/TDS/temperature probes utilize a fiber junction and gel electrolyte which provide fast response and reduced contamination. This combination makes these probes particularly suitable to be used in fertilizer solutions.

These probes can be used with instruments that use the same connector.

- **Built-in pH, amperometric EC and temperature sensor**
- **Specialized rugged probe**

Designed for harsh environments such as fertilizer solutions.

### ORDERING INFORMATION

**HI 9813-5** is supplied with HI 1285-5 multiparameter probe, HI 70007 pH 7.01 calibration solution sachet, HI 70442 1500 ppm (mg/L) calibration solution sachet, HI 70031 1413 µS/cm calibration solution sachet, HI 700661 electrode cleaning solution sachets (2), battery, instructions and rugged carrying case.

**HI 9813-6** is supplied with HI 1285-6 multiparameter probe, HI 70007 pH 7.01 calibration solution sachet, HI 70442 1500 ppm (mg/L) calibration solution sachet, HI 70031 1413 µS/cm calibration solution sachet, HI 700521 electrode cleaning solution sachets (2), battery, instructions and rugged carrying case.

### PROBES

**HI 1285-5** Polypropylene body, pre-amplified multiparameter probe with internal temperature sensor, 8-pin DIN connector and 1 m (3.3') cable.

**HI 1285-6** Polypropylene body, pre-amplified multiparameter probe with CAL CHECK™ compatibility, internal temperature sensor, 8-pin DIN connector and 1 m (3.3') cable

### CALIBRATION SOLUTIONS

**HI 7031L** 1413 µS/cm calibration solution, 500 mL  
**HI 70442L** 1500 ppm (mg/L) calibration solution, 500 mL

### pH BUFFER SOLUTIONS

**HI 7004L** pH 4.01 buffer solution, 500 mL  
**HI 7006L** pH 6.86 buffer solution, 500 mL  
**HI 7007L** pH 7.01 buffer solution, 500 mL  
**HI 7009L** pH 9.18 buffer solution, 500 mL  
**HI 7010L** pH 10.01 buffer solution, 500 mL

### OTHER SOLUTIONS

**HI 700661P** Cleaning solution, 20 mL sachets (25)  
**HI 50021P** Check solution, 20 mL sachets (25)  
**HI 70300L** Electrode storage solution, 500 mL

### OTHER ACCESSORIES

**HI 710007** Shockproof rubber boot, blue  
**HI 710008** Shockproof rubber boot, orange

SPECIFICATIONS		HI 9813-5	HI 9813-6
Range	pH	0.0 to 14.0 pH	
	EC	0.00 to 4.00 mS/cm	
	TDS	0 to 1999 ppm (mg/L)	
	Temperature	0.0 to 60.0°C	
Resolution	pH	0.1 pH	
	EC	0.01 mS/cm	
	TDS	1 ppm (mg/L)	
	Temperature	0.1°C	
Accuracy (@20°C/68°F)	pH	±0.1 pH	
	EC	±2% F.S.	
	TDS	±2% F.S.	
	Temperature	±0.5°C	
TDS Conversion Factor		0.56 to 0.78 ppm = 1 µS/cm (according to TDS 442 curve)	
pH Calibration		manual, one point (all parameters except temperature)	
Temperature Compensation		automatic 0 to 50°C (32 to 122°F) with β=2%/°C (EC/TDS only)	
Probe		HI 1285-5 polypropylene body, pre-amplified multiparameter probe with internal temperature sensor, 8-pin DIN connector and 1 m (3.3') cable (included)	HI 1285-6 polypropylene body, pre-amplified multiparameter probe with CAL CHECK™ compatibility, internal temperature sensor, 8-pin DIN connector and 1 m (3.3') cable (included)
Battery Type / Life		9V / approximately 150 hours of continuous use	
Environment		0 to 50°C (32 to 122°F); RH max 100%	
Dimensions		145 x 80 x 36 mm (5.7 x 3.1 x 1.4")	
Weight		230 g (8.1 oz.)	

For a complete list of Solutions, see the end of pH Section 3 and Conductivity Section 6.

HI 9811-5 • HI 9812-5

## pH/EC/TDS/Temperature Portable Meters

- Water resistant
- On-screen tutorial messages for calibration
- Switch parameters at the touch of a button
- Automatic Temperature Compensation  
For pH and conductivity
- Simple calibration  
Dials located on the front panel makes calibration quick and simple, even for non-technical users
- BEPS  
(Battery Error Prevention System) alerts the user in the event that low battery power could adversely affect readings
- Battery % displayed on startup
- Fast response probe included

HI 9811-5 and HI 9812-5 are pH/EC/TDS waterproof meters designed for simplicity in taking pH,  $\mu\text{S}/\text{cm}$ , ppm (mg/L) and temperature measurements. both the HI 9811-5 and HI 9812-5 are ideal for hydroponics, greenhouses, farming and ground water applications.

Due to the built-in temperature sensor, conductivity readings are automatically compensated for temperature changes. The temperature coefficient is fixed at 2%/°C.

No probe changes are required when switching your measured parameter between pH, conductivity and TDS. These multiparameter meters reduce the number of instruments required for daily water quality analysis.



- Protective rubber boot  
The optional rubber boot helps protect your meter



### HI 1285-5 Probe

The specially engineered HI 1285-5 pH/EC/TDS and temperature probe utilizes a fiber junction and gel electrolyte which provide a fast response and reduced contamination. This combination makes the HI 1285-5 particularly designed to withstand harsh environments such as fertilizer solutions.

#### ORDERING INFORMATION

HI 9811-5 and HI 9812-5 are supplied with HI 1285-5 multiparameter probe, HI 70007 pH 7.01 calibration solution sachet, HI 70032 1382 ppm (mg/L) calibration solution sachet, HI 70031 1413 μS/cm calibration solution sachet, HI 700661 electrode cleaning solution sachets (2), battery, instructions and rugged carrying case.

#### ELECTRODES

**HI 1285-5** Polypropylene body, pre-amplified multiparameter probe with internal temperature sensor, 8-pin DIN connector and 1 m (3.3') cable.

#### CONDUCTIVITY & TDS CALIBRATION

##### SOLUTIONS

**HI 7031L** 1413 μS/cm calibration solution, 500 mL  
**HI 7032L** 1382 ppm (mg/L) calibration solution, 500 mL

##### pH BUFFER SOLUTIONS

**HI 7004L** pH 4.01 buffer solution, 500 mL  
**HI 7006L** pH 6.86 buffer solution, 500 mL  
**HI 7007L** pH 7.01 buffer solution, 500 mL  
**HI 7009L** pH 9.18 buffer solution, 500 mL  
**HI 7010L** pH 10.01 buffer solution, 500 mL  
**HI 70300L** Electrode storage solution, 500 mL  
**HI 7061L** Electrode cleaning solution, 500 mL

##### OTHER ACCESSORIES

**HI 710007** Shockproof rubber boot, blue  
**HI 710008** Shockproof rubber boot, orange

SPECIFICATIONS		HI 9811-5	HI 9812-5
Range	pH		0.0 to 14.0 pH
	EC	0 to 6000 μS/cm	0 to 1990 μS/cm
	TDS	0 to 3000 ppm (mg/L)	0 to 1990 ppm (mg/L)
	Temperature		0 to 60°C
Resolution	pH		0.1 pH
	EC		10 μS/cm
	TDS		10 ppm (mg/L)
	Temperature		0°C
Accuracy (@20°C/68°F)	pH		±0.1 pH
	EC		±2% F.S.
	TDS		±2% F.S.
	Temperature		±0.5°C
TDS Conversion Factor		0.5 ppm (mg/L) = 1 μS/cm	
Calibration		manual, one point (all parameters except temperature)	
Temperature Compensation		automatic from 0 to 50°C (32 to 122°F) with β = 2% /°C (EC/TDS only)	
Probe		HI 1285-5 polypropylene body, pre-amplified multiparameter probe with internal temperature sensor, 8-pin DIN connector and 1 m (3.3') cable (included)	
Battery Type / Life		9V / approximately 150 hours of continuous use	
Environment		0 to 50°C (32 to 122°F); RH max 100%	
Dimensions		145 x 80 x 36 mm (5.7 x 3.1 x 1.4")	
Weight		230 g (8.1 oz.)	

For a complete list of Solutions, see the end of pH Section 3 and Conductivity Section 6.



## Replacement Electrodes



CODE	HI1285-6	HI 1285-5	HI 1288
Description	preamplified pH and EC probe	preamplified pH and EC probe	preamplified pH and EC probe
Reference	single, Ag/AgCl	single, Ag/AgCl	single, Ag/AgCl
Junction / Flow Rate	cloth	cloth	cloth
Electrolyte	gel	gel	gel
Max Pressure	0.1 bar	0.1 bar	1 bar
Range	pH: 0 to 13 / EC T: 20 to 40°C (68 to 104°F)	pH: 0 to 13 / EC T: 20 to 40°C (68 to 104°F)	pH: 0 to 13 / EC T: 20 to 40°C (68 to 104°F)
Tip /Shape	spheric (dia: 8.0 mm)	spheric (dia: 8.0 mm)	spheric (dia: 8.5 mm)
Temperature Sensor	yes	yes (HI 1285-5 only)	yes
Amplifier	yes	yes	yes
Body Material	polypropylene	polypropylene	PVC
Cable	7-pole; 2 m (3.3')	7-pole; 2 m (6.6')	7-pole; 1.2m (3.93')
Recommended Use	greenhouses, hydroponics, environmental monitoring, water treatment, boilers, cooling towers	greenhouses, hydroponics, environmental monitoring, water treatment, boilers, cooling towers	general purpose, water treatment, agriculture, boilers, cooling towers

### PLUG

HI 1285-6 DIN\* with CAL-CHECK™ for HI 9813 series

### PLUG

HI 1285-5 DIN\*

### PLUG

HI 1288 DIN†

\* To be used with HI 9811, HI 9812 and HI 9813 series

† To be used with HI 991300 and HI 991301